
## Throttle Trim

Adjust the throttle trim so the carburetor is completely closed at neutral and there is a little gap between the servo rocker arm and collar (Fig. A: gap should be less than1mm). If throttle rocker arm is not close to its desired neutral position, and throttle cannot be centered using trim, please take the following steps:

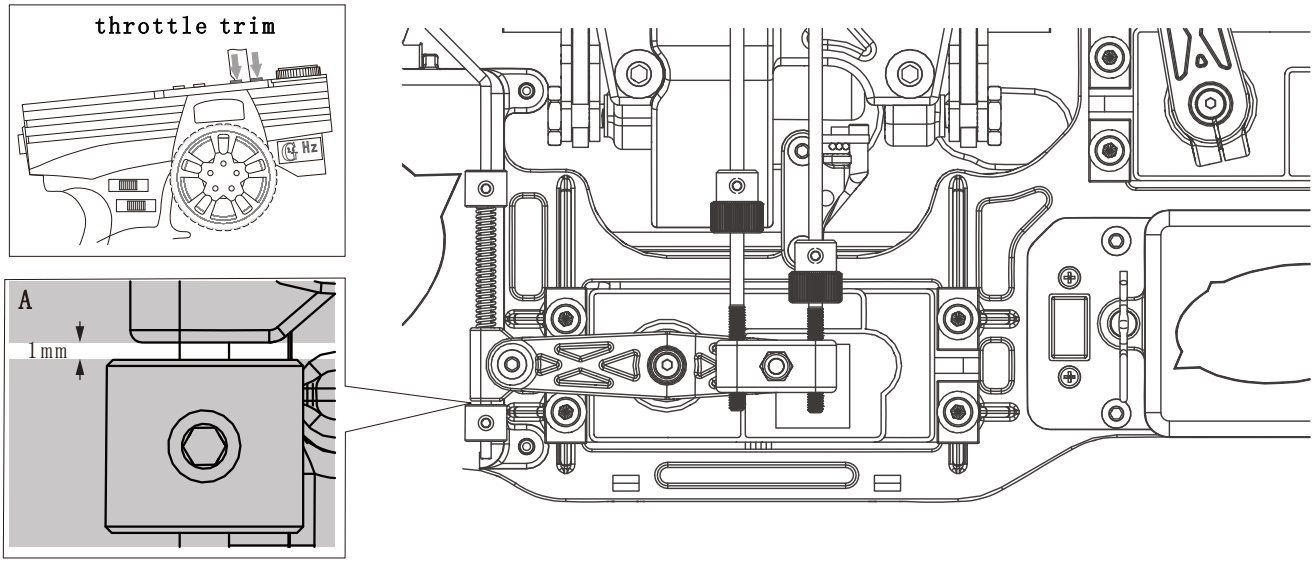


1. Make sure transmitter throttle trim are set to “0” or neutral.
2. Remove the servo output rocker arm using a 2.0mm hexagon wrench, exchange angle to install the rocker arm in correct orientation.
3. Trim the throttle adjust the throttle rocker arm to the neutral position as described above.

## Turning R/C Off

Turn off the receiver first, then turn off the transmitter.

